



10CN 

RoHS&Pb-Free SERIES
THROUGH HOLE MOUNTING FUSE (NORMAL-BLOW)
通孔插装式保险丝（普通型）

BREAKING CAPACITY/ 分断能力:
2000A at 500V AC
10KA at 250V AC

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证		I ² T 参考值 REFERENCE (A ² .Sec.) (RoHS)
		cURus/TUV/CCC		
		H	H1	
10CN-300H/H1	30A	●	●	2543
10CN-400H/H1	40A	●	●	3911
10CN-500H/H1	50A	●	●	6683
10CN-600H/H1	60A	●	●	15194
10CN-630H/H1	63A	●	●	18060
● DENOTES FOR APPROVED H DENOTES FOR 250V H1 DENOTES FOR 500V		● 表示已取得安全认证 H 代表 250V H1 代表 500V		


ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	1 hour Min.	最快 1 小时
200%	120 seconds Max.	最慢 120 秒
1000%	1 seconds Max.	最慢 1 秒

Standards/ 标准: UL248-1, UL248-13, EN60127-1, EN60127-7, GB/T13539-4
Operating Temperature/ 工作温度: -55°C~+125°C .
Storing Temperature/ 储存温度: -55°C~+85°C .
Resistance to soldering heat/ 耐焊接热性: 260°C , 10s Max
Solderability/ 可焊性: 245°C ±5°C , 5s±0.5s

Dimensions/ 尺寸:

Unit 单位: mm

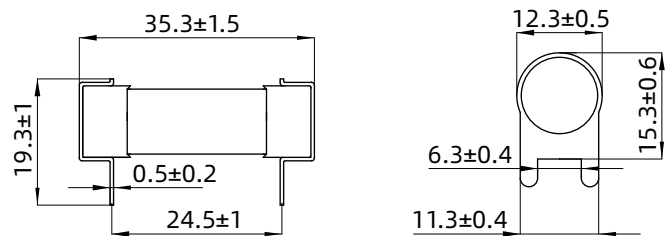

10CN AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)
10CN 平均 I-T 曲线图 (仅供参考)

