



BOARD TYPE BOLT FUSE
板式螺栓保险丝

INTERRUPTING CAPACITY / 分断能力:
20000A at 125VDC(100A-500A) TUV

TECHNICAL PARAMETERS/ 技术参数：


PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证	REFERENCE VALUE OF I2T (A2.sec) I2T 参考值
		TUV L	
BTM -100 L	100A	●	9600
BTM -150 L	150A	●	19000
BTM -200 L	200A	●	35000
BTM -250 L	250A	●	69000
BTM -300 L	300A	●	90000
BTM -350 L	350A	●	112000
BTM -400 L	400A	●	277000
BTM -500 L	500A	●	521000

● DENOTES FOR APPROVED
L DENOTES FOR 125V

● 表示已取得安全认证
L 代表 125V

Dimensions/ 尺寸：

Unit 单位：mm

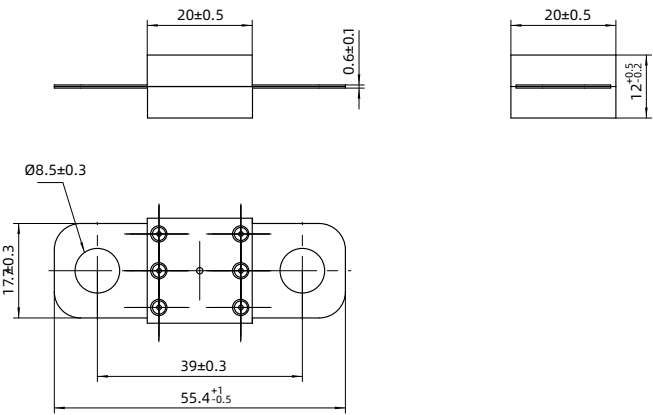

BTM AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

BTM 平均 I-T 曲线图 (仅供参考)

ELECTRICAL CHARACTERISTICS/ 电气特性：

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
300%	10 seconds Max.	最慢 10 秒

Standards/ 标准：EN 60269-1, EN 60269-7, IEC 60269-1, IEC 60269-7
Operating Temperature/ 工作温度：-55°C ~125°C
Storing Temperature/ 存储温度：-55°C ~85°C

